

1 MTS 140-70 R46 DQ



Screw spindle pump designed for pumping of cooling lubricants and cutting oils water/oil emulsion min. 3% for machine tool applications. The pump is designed to be mounted on top of tanks with pump immersed in the pumped liquid.


The pump has the following characteristics:

- High efficiency ensures very low heat input into the cooling lubricant.
- Axial thrust completely neutralised hydrostatically.
- Very wear resistant due specially hardened surfaces.
- DQ - shaft seal ring.
- Power transmission via cast iron flexible coupling.


The motor is a 3-phase AC motor.

:	:	Emulsion
:	:	80 °C
:	:	20 °C
:	:	998.2 kg/m ³
:	가	: 3500 rpm
1	:	271 l/min
가:	:	DQ
:	:	CE
:	:	55 °C
:	:	70 bar
:	:	G2"
:	:	G 1 1/4" / SAE 1 1/2"
:	:	386 mm
:	:	FF400
IE	:	SIEMENS
- P2:	:	NEMA Premium / IE3 60Hz
(P2):	:	45 kW
:	:	40.5 kW
:	:	60 Hz
:	:	3 x 380-420D/660-725Y V
:	:	81,0-73,0/47,0-42,0 A
cos phi -	:	760-760 %
:	:	0.90
:	:	3555 rpm
:	:	IE3 94,2%
3/4	:	94.2-94.2 %
1/2	:	94.3-94.3 %
:	:	93.7-93.7 %
:	:	2
(IEC 34-5):	:	55 Dust/Jetting

MTS 140-70 R46 DQ 60 Hz

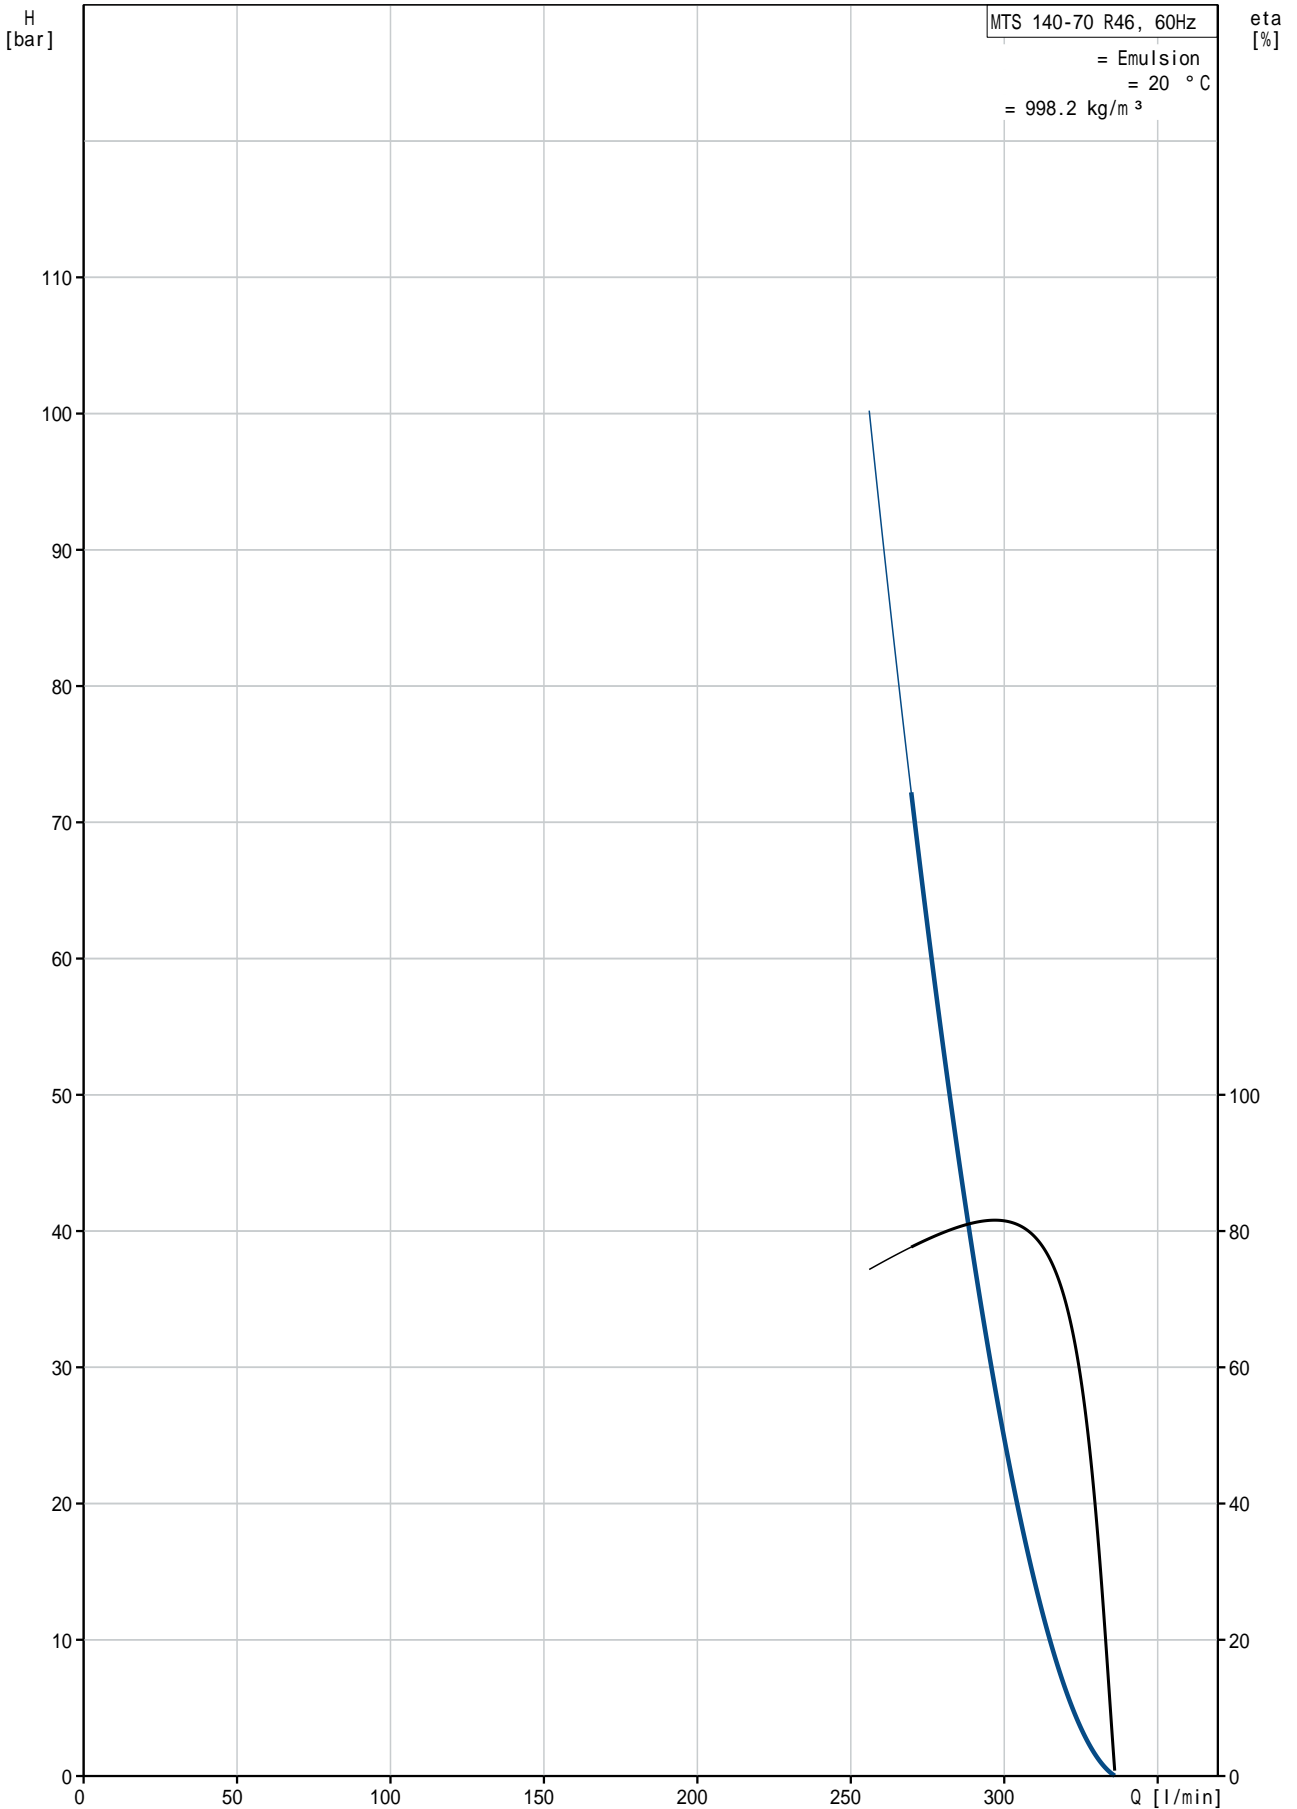


MTS 140-70 R46 DQ 60 Hz

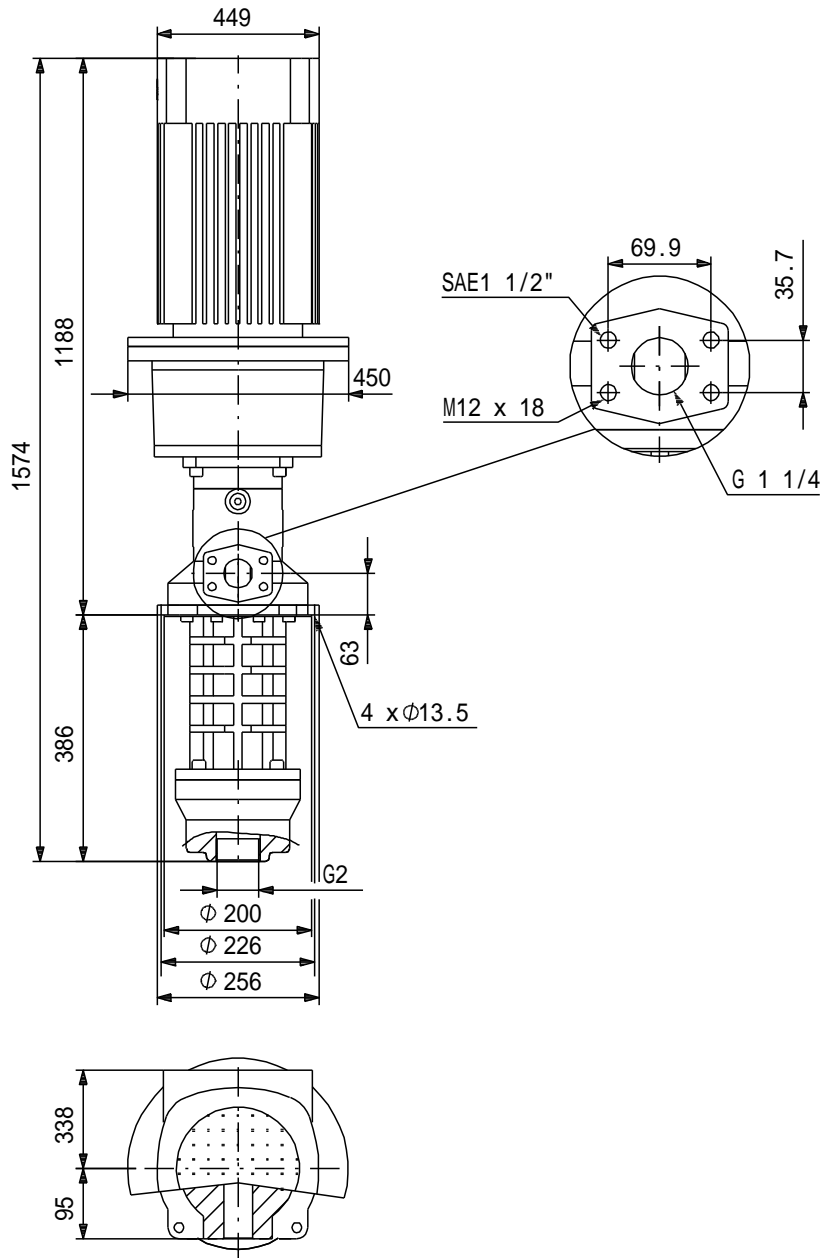

!

[mm]

MTS 140-70 R46 DQ 60 Hz

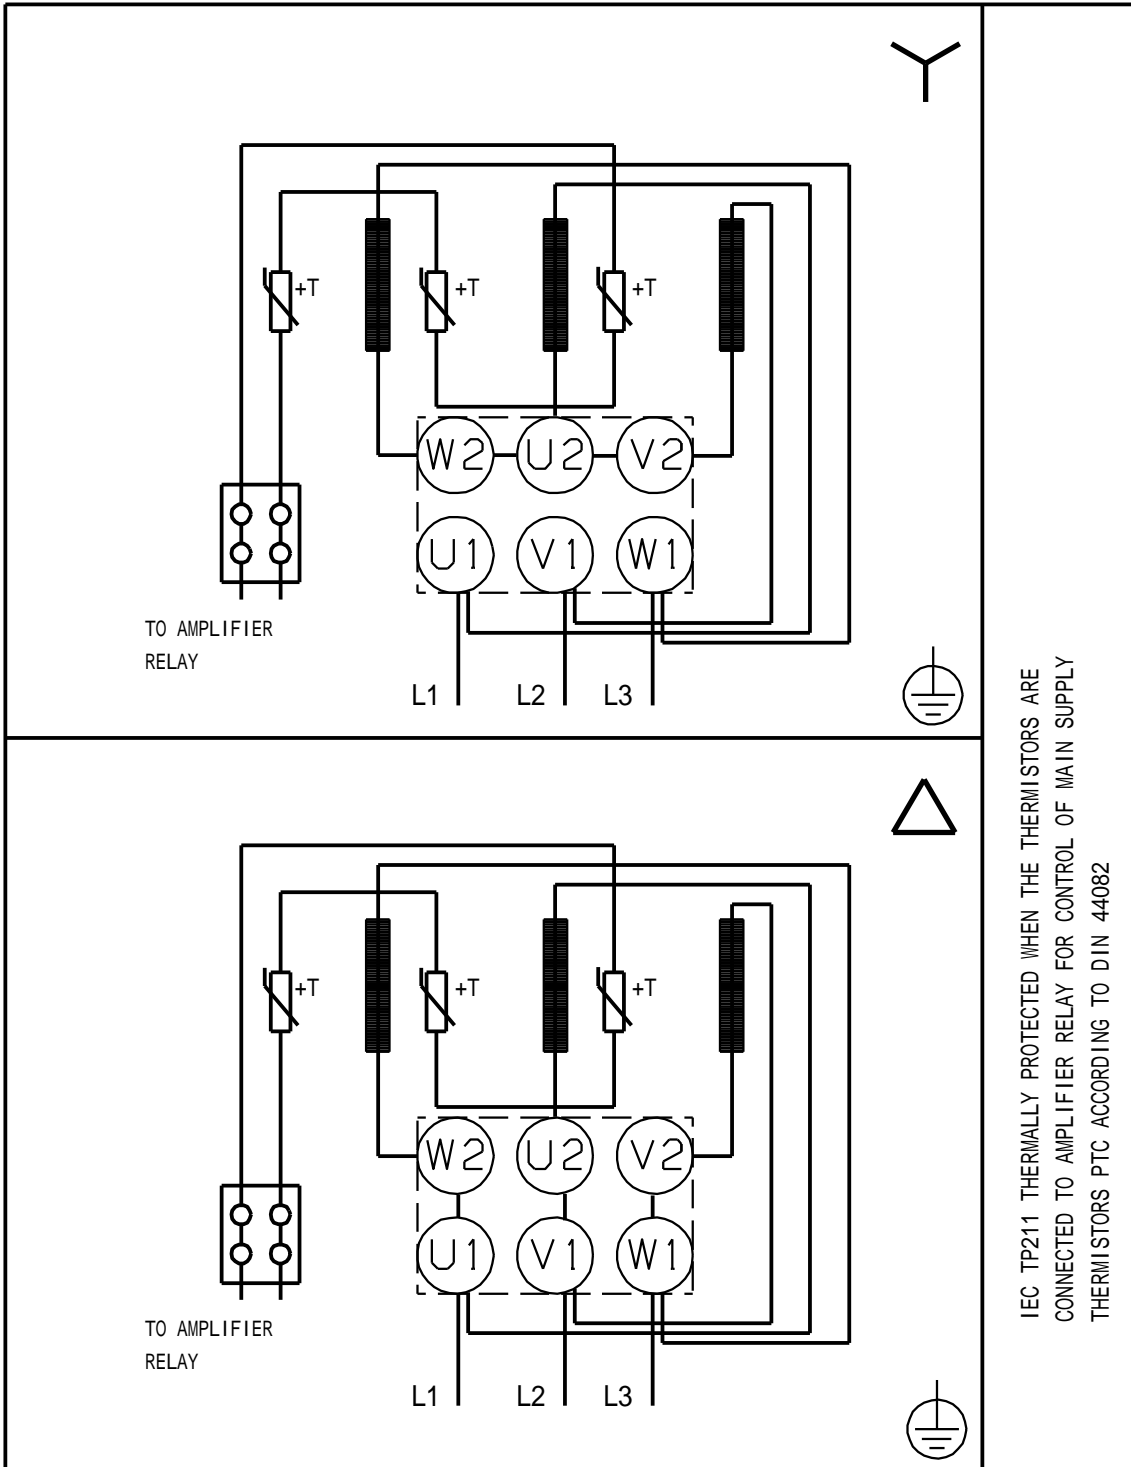

!

[mm]